


Model 1800-VFG-C




Capacity in m³/hour at static pressure of:


MODEL	10Pa	20Pa	40Pa
1800-VFG-C	1800	2700	3600



Model 1800-VFG-C

Flange model with the flange on the front side for almost all applications. Divided air direction; up to 35% air enters only from the top side; above 35% also from the bottom side. Air inlet valve is equipped with a stainless steel central control arm. This inlet is executed with a slightly curved inner flap. The more square shape makes the control during minimum ventilation better.

 Member of SP Group A/S

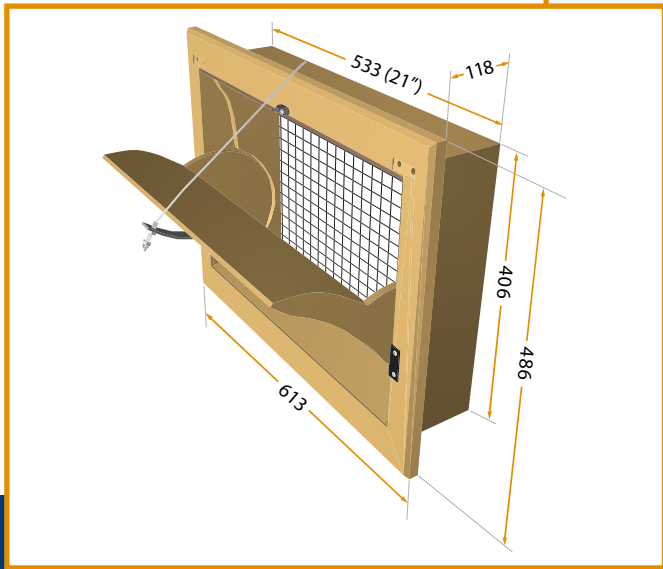

TPI-Polytechniek BV

De Steenbok 24
5215 ME 's-Hertogenbosch
The Netherlands

Phone: +31 (0)73-656 91 94
Fax: +31 (0)73-656 69 33

E-mail: info@tpi-polytechniek.com
Internet: www.tpi-polytechniek.com